

93.00 PCB

87.00

71.70 V.A



66.52 A.A

88.70

85.08

88.70

REV	DATE	DESCRIPTION	DESIGNED	CHECK	APPROVED
-----	------	-------------	----------	-------	----------

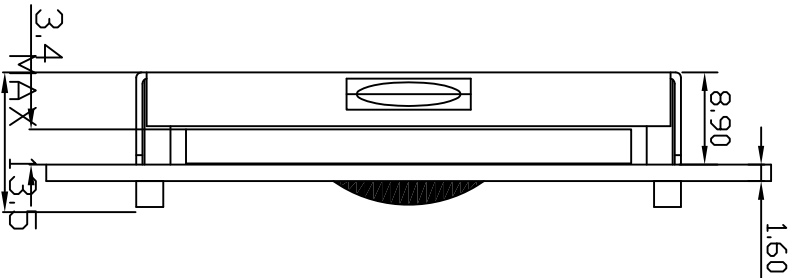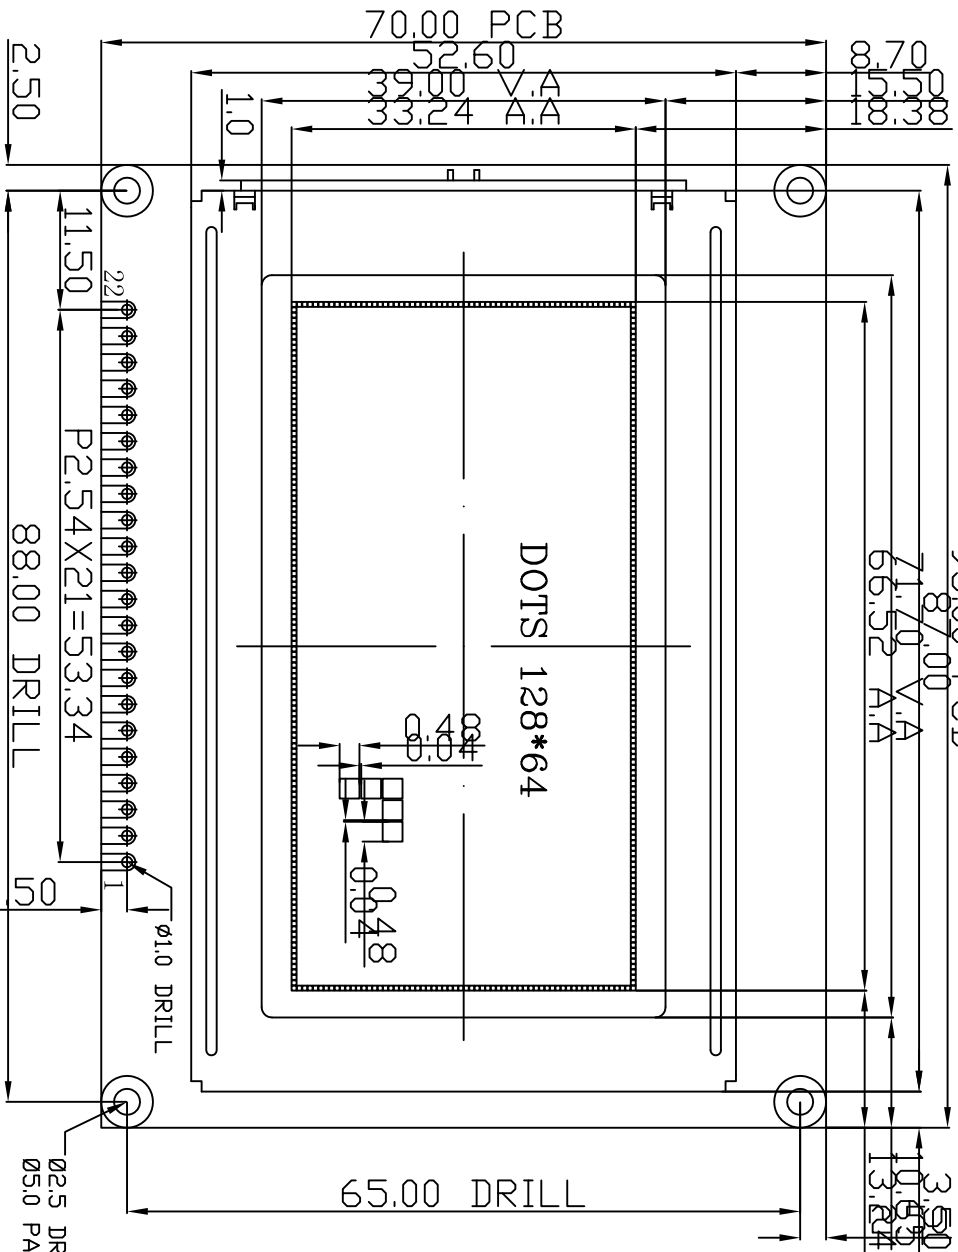

21	22	P2.54X21=53.34
----	----	----------------

PIN NO.	1	2	3	4	5	6	7	8	9	10	21	22
SYMBOL	CS1	CS2	VSS	VDD	VO	RS	R/W	E	DO	D1	A	K
PIN NO.	11	12	13	14	15	16	17	18	19	20		
SYMBOL	D2	D3	D4	D5	D6	D7	CS1	CS2	RST	VOUT		

NOTE:

1. DISPLAY MODE: STN/Y-G/POSITIVE/TRANSPARENT
2. VIEWING DIRECTION: 6:00
3. OPERATION TEMP: -28° C - +70° C
4. STORAGE TEMP: -35° C - +80° C
5. DRIVE METHOD: 1/6DUTY, 1/9BIAS, Vop=9.0V
6. CONTROLLER: KS0107&KS0108 OR COMPATI
7. VDD=5.0V, ILED=45mA (@VLED=3.1V), COLOR: White

SHIJIAZHANG CHUANGDI TECHNOLOGY CO.,LTD

CUSTOMER'S CODE:

MODEL NO.: CSM-12864AV2

A-0REV:

UNMARKED TOLERANCE:



Plze:

