



REV	DATE	DESCRIPTION	DESIGNED	CHECK	APPROVED

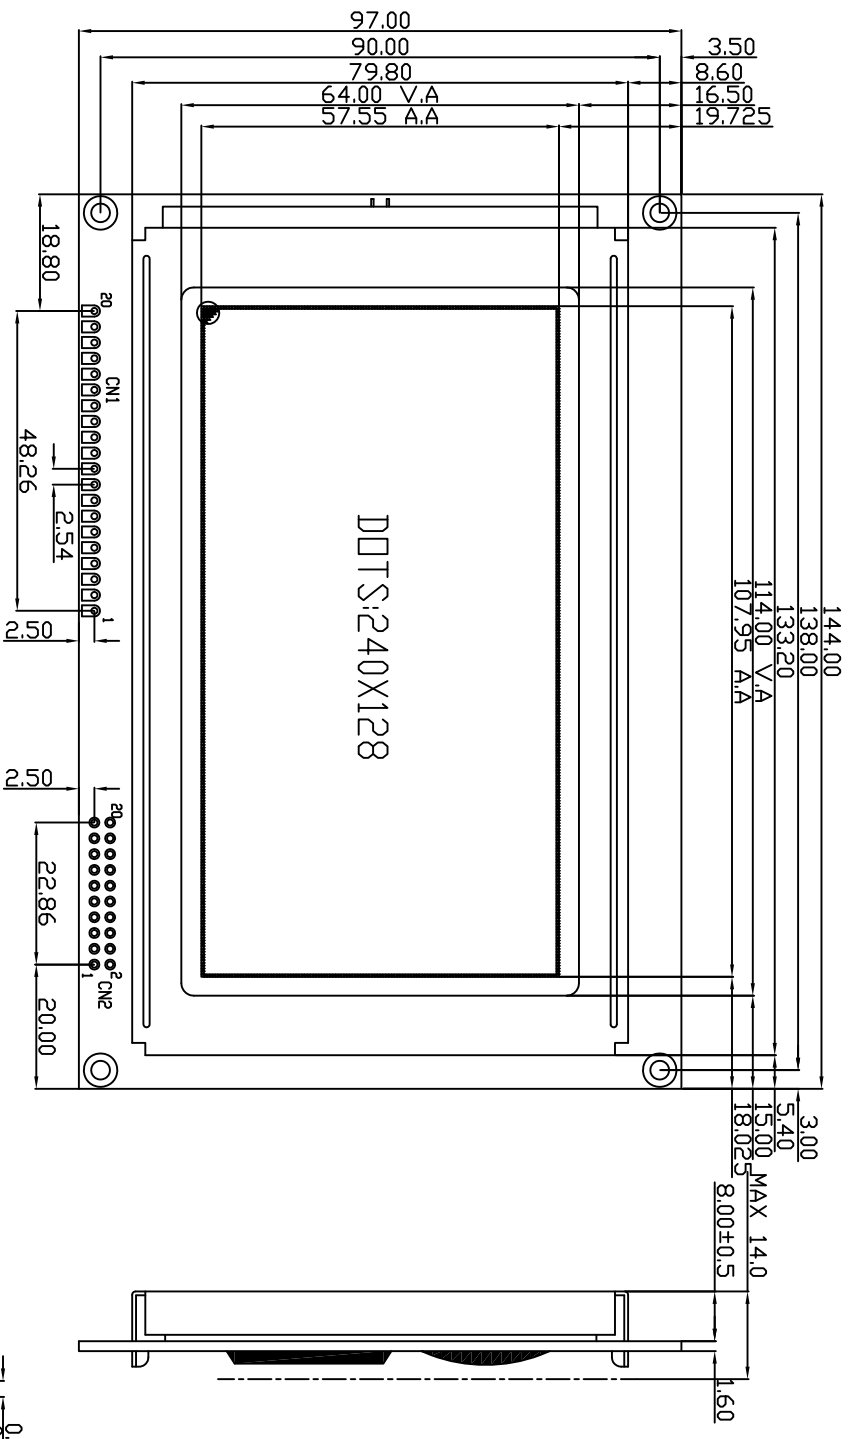

No.	PIN
1	VSS
2	VDD
3	VO
4	/MR
5	/RD
6	/CS
7	C/D
8	/RES
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	BUSY
18	VOUT
19	A
20	K



- NOTE:
1. DISPLAY MODE: STN-BLUE, NEGATIVE/TRANSMISSIVE
  2. VIEWING DIRECTION: 6:00
  3. OPERATION TEMP: -20° C - +70° C
  4. STORAGE TEMP: -30° C - +80° C
  5. DRIVE METHOD: 1/128DUTY, 1/12BIAS
  6. CONTROLLER: RA8822, BUILD IN DC-DC
  7. VDD=5.0V, ILED=90mA (@VLED=5.0V), COLOR: WHITE