
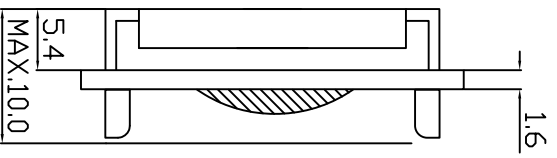


REV	DATE	DESCRIPTION	DESIGNED	CHECK	APPROVED

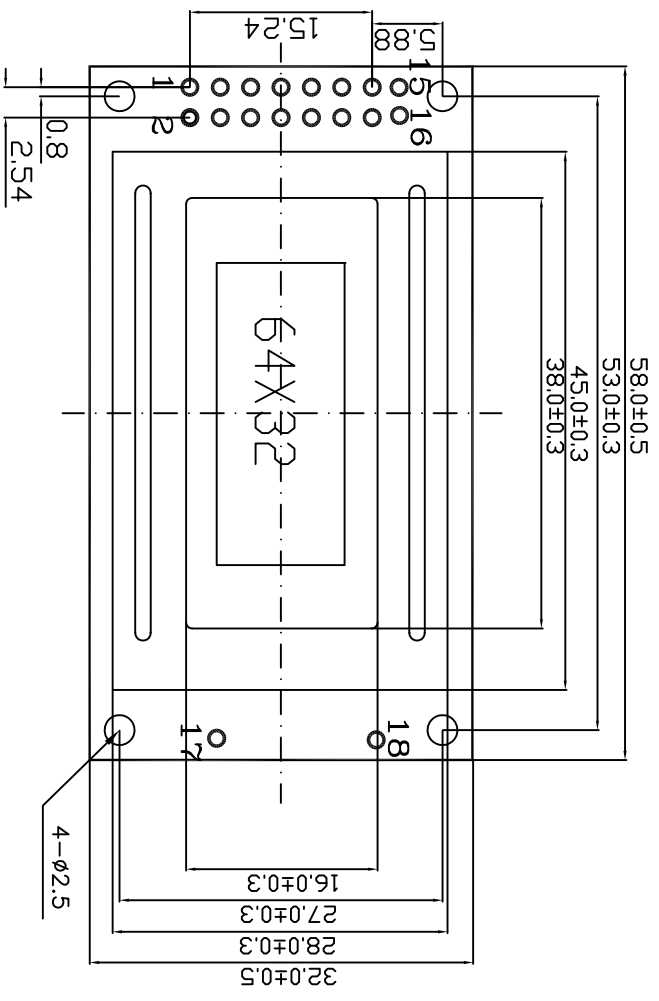

Pin No.	1	2	3	4	5	6	7~14	15	16	17	18
Symbol	Vss	Vdd	Vo	RS/CS	R/W(SID)	E(SCLK)	DB0~DB7	RST	VOUT	LED+	LED-

1. 显示模式: STN、蓝模负显、全透或STN 黄绿正显、半透
2. 视向: 6点
3. 工作温度: -20度-70度, 存储温度: -30度-80度
4. 工作电压: 3v或5v
5. 背光: 白色或黄绿LED
6. 驱动IC: ST7920